
TYPICAL SECTION

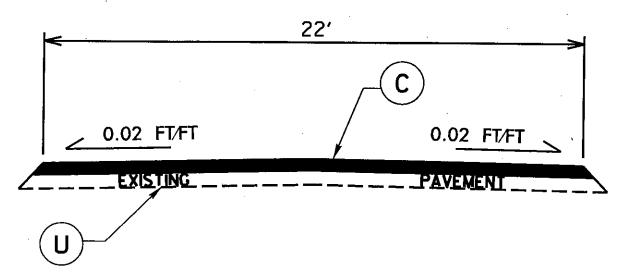

TYPICAL SECTION NO. 1

| PAVEMENT SCHEDULE | |
|-------------------|--|
| С | PROP. APPROX. $1\frac{1}{2}$ " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. |
| C1 | PROP. APPROX. 194" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE HATE OF 168 LBS. PER SQ. YD. |
| D | PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. |
| E | PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. |
| E1 | PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE 825.08, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. |
| F | MAT COAT NO. 6 STONE |
| V | MILLING ASPHALT PAVEMENT. 1½" DEPTH. |
| Τ | EARTH MATERIAL |
| U | EXISTING PAVEMENT. |